



EasyStand



General characteristics

- Nominal content: 40, 60, 80, 100 and litres
- Kettle bowl in acid resistant steel, all other parts in stainless steel
- Fully welded, insulated kettle body with a volume scale inside the kettle
- Working pressure: 1,0 bar
- Max. steam temperature: 120° C
- Base plate with seals inside the outer jacket of the kettle
- Integrated isolator switch
- Pressure gauge
- Tilting height: See technical data
- Unheated top for lower energy waste and better comfort
- Hinged easy open/close lid with an ergonomic lid arm
- Lid made from stainless steel
- Maximum temperature on the outside of the kettle bowl after 3 hours cooking: <40°C
- Working height: 900 mm
- Small quantity of water in the steam generator – for quick heating, low energy waste and short reaction times
- Heating elements at the front of the kettle—no heating elements above water level - prevents overheating and prolongs kettle's lifetime
- Electrically heated kettles have automatic filling of water in the steam generator

Control AutoTemp 02 e

- Electronic heat control with turning knob
- Water filling into the kettle with cold water dispenser
- Automatic water filling into the steam generator when water level is low
- Indicator light for kettle in use
- Indicator light to indicate excessive pressure in the kettle/ overheating of heating elements

Control Auto Temp 32 (optional)

- Electronic control of the jacket temperature
- Timer for cooking time/hour
- Clock
- Electronic water flow meter with drip-free spout
- Access code can be selected
- Two sets of arrow keys for fast, precise setting
- Temperature unit: Celsius or Fahrenheit
- Quantity unit: Litres, UK gallon or US gallon

Other options

- Manual chilling with water from the mains supply
- Connection to Power-Management-Systemer
- Drain valves/ Butterfly valves
- Rotatable lid
- Spray gun


Extra accessories

- Sieve plate
- Pouring plate
- Measuring rod
- Pouring assistent
- Embedding frame
- Trolley

Variants

- 3x230V, 3x440V

EasyStand

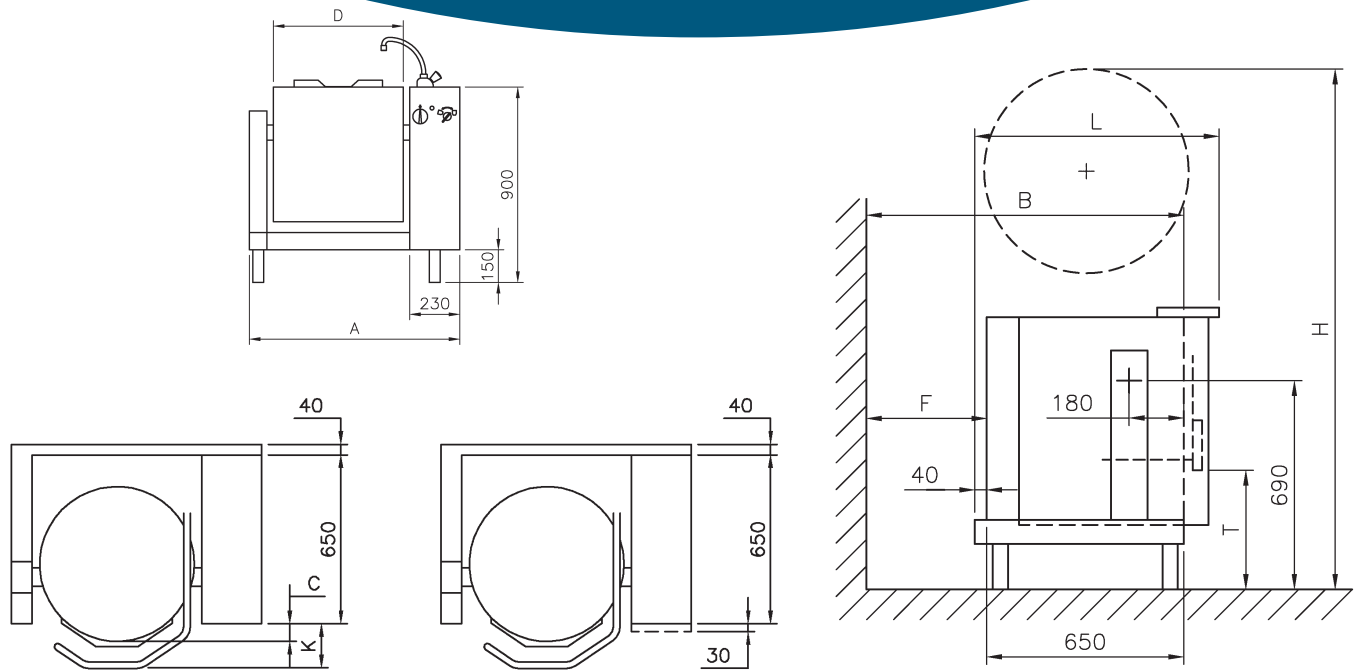

Type	A [mm]	B [mm]	C [mm]	D [mm]	F [mm]	H [mm]	K [mm]	L [mm]	T [mm]	Nom/Brim volume [liter]
EasyStand 40	916	750	43	546	100	1728	178	753	447	40/48
EasyStand 60	965	774	68	595	124	1779	203	778	423	60/70
EasyStand 80	995	829	83	625	179	1800	218	793	408	80/91
EasyStand 100	1045	860	108	675	210	1830	243	818	383	100/113

Data for standard connection to 3~400V+N

For connection to other voltages, see technical data

Type	Weight* [kg]	Electric		
		Rated power [kW]	Current consumption [A]	Time to boil 10-90 °C [min]
EasyStand 40	136	15	3x22	ca. 15
EasyStand 60	148	15	3x22	ca. 23
EasyStand 80	167	15	3x22	ca. 30
EasyStand 100	172	20	3x29	ca. 28

*The exact weight depends on the equipment and accessories chosen